


CURVE/SPOT LIGHT/ANTI-GLARE/TILTABLE

Model: RR-DL3539

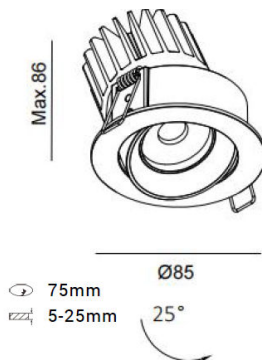

Feature:

- Compact Design
- Stylish Arc appearance
- Anti-glare design

Technical data:

▪ Light source	Citizen COB or others
▪ LED Power (max.)	12.6W (350mA, 36V)
▪ System Power (ref.)	15W (ref. only depends on the ECG)
▪ Lumen flux (typ.)	1000lm @3000K, Ra 90
▪ Colour temperature	2700K, 3000K, 4000K
▪ Colour rendering index	Ra \geq 90
▪ MacAdam Step	3 MacAdam
▪ Beam Angle	24D, 36D PMMA Lens
▪ Tilttable	Yes
▪ Ingress protection	IP54
▪ Operation temperature	0-40C
▪ Protection Class	III
▪ LED Life time	50,000h L70B10
▪ Finishing	White RAL9003/Black RAL9005
▪ Construction	Aluminum
▪ Installation	Ceiling Recessed, spring type
▪ Dimension	85mm(OD)x86mm(H)/cutout75mm
▪ LED Driver	Remote
▪ Trimless version	Yes, Please check with sale in detail

Electronic control gear

NON-DIM/Dimmable	IDP MP series
1-10V/0-10V/DALI	IDP SC series
	Other brand is available upon request

*Use IDP multi-power LED Driver can trim down the output power according to actual application.

LED output power table (used IDP MP18 Electronic control gear)

Drive current @150mA	5.4W (ref.)
Drive current @200mA	7.2W (ref.)
Drive current @250mA	9.0W (ref.)
Drive current @300mA	10.8W (ref.)
Drive current @350mA	12.6W (ref.)

****The specification is subject to change without note.****