


SIMPLE/SPOT LIGHT/SQUARE/FIXED

Model: SR-DL3042

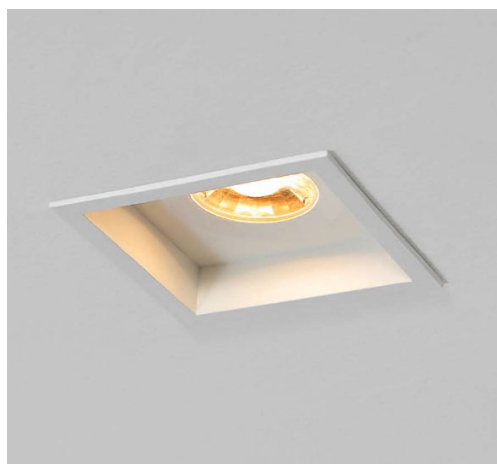

Feature:

- Compact size
- Step in design
- Square Trim

Technical data:

- Light source COB or others
- LED Power (max) 9W (250mA, 36V)
- System Power (ref.) 11W (ref. only depends on the ECG)
- Lumen flux (typ.) 650lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 24D, 36D, 45D PMMA Lens
- Tilttable No
- Ingress protection IP54
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Ceiling Recessed, Spring type
- Dimension 91x91mm/Cutout 85x85mm
- LED Driver Remote
- Trimless version No

Electronic control gear

NON-DIM/Dimmable


IDP MP series


1-10V/0-10V/DALI


IDP SC series

Other brand is available upon request

*Use IDP multi-power LED Driver can trim down the output power according to actual application.



 Cutout: 85x85mm

 5-25mm

Light Distribution For 3000K

medium 36°

wide 47°

h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	1218	ø0.65	1	1399	ø0.86
2	304.6	ø1.30	2	349.7	ø1.73
3	135.4	ø1.95	3	155.4	ø2.60
4	76.15	ø2.60	4	78.44	ø3.47
5	48.74	ø3.25	5	55.96	ø4.34

****The specification is subject to change without note.****