

25W 500mA/700mA In-Door Multi-Power LED Driver

Product Offering



Order part number:
MP-AD-025W-0A50-A-F-20
MP-AD-025W-0A70-A-F-20

Product Description:

- Multi-Power constant current output
- Active power factor control
- IP20 independent LED driver, for indoor use
- Nominal life 50,000hrs (at tc 65 °C with a failure rate <0.2% per 1,000hrs)

Feature:


- High efficiency; PF > 0.9
- Start up time < 0.5sec; No-load consumption < 0.5W
- Multi-Power LED driver with output current selection by Dip-Switch selector
- Fully protected: Short circuit, input voltage surge, overvoltage protection, over-temperature protection

Technical Data

Rated supply voltage, AC	220-240 Vac, 50/60Hz
AC Voltage range, AC	194-264 Vac, 50/60Hz
Survive input range (for 30mins)	170-305 Vac, 50/60Hz
Rated current @230Vac	<0.12A
Leakage current @240Vac	<250µA@240Vac
Max. input power	30W
Typ. efficiency (at 230V 50Hz, full load)	Typ. 85%
Inrush current	<6A (T-width @25µs)
Typ. λ (at 230 V 50Hz, Full load)	>0.9
Typ. λ (at 230 V 50Hz, Min. load)	>0.7
Turn on time (at 230V 50Hz, full load)	<0.5s
Max. no load consumption	<0.5W
Output rated power (depends on the output setting)	25W
Ambient temperature ta	-15 ... +45 °C
Max. Casing temperature tc	75 °C
Size (mm)	131x44x23
Weight	110g

Output Current Selecting Table

Output current selector



200-500mA selection

Output Current Selector	1	2	3	4
500mA	○	○	○	○
450mA	○	○	○	●
400mA	○	○	●	○
350mA	○	●	○	○
300mA	●	○	○	○
250mA	●	○	●	○
200mA	●	●	○	○

350-700mA selection

Output Current Selector	1	2	3	4
700mA	○	○	○	○
650mA	○	○	○	●
600mA	○	○	●	○
550mA	○	●	○	○
500mA	●	○	○	○
450mA	●	○	○	○
400mA	●	●	○	○
350mA	●	●	○	○

Standard comply

EN55015; EN61000-3-2; EN61000-3-3; EN61547;
EN61347-1; EN61347-2-13; SELV

Specific Technical Data



Order Part number	Max. output current	Output voltage	Output current tolerance
MP-AD-025W-0A50-A-F-20	200-500mA ⁽¹⁾⁽²⁾	15 - 52 Vdc (max. 60 Vdc)	±5%
MP-AD-025W-0A70-A-F-20	350-700mA ⁽¹⁾⁽²⁾	12 - 37 Vdc (max. 45 Vdc)	±5% ⁽³⁾

Remark:
(1) For details please refer to "output current selector" section
(2) For detail specification, please refer to the "Technical Information".

Notes:
- Specifications may vary without notice
- Always consult local electrical codes
- Parameters are measured at rated output, rated load and at an ambient temperature of 25°C
- Expect slight variation including component tolerance, setup tolerance, line regulation and load regulation.
- Power supplies should always be stress tested and tested for EMC within specific fixture
- Where grounding/earthing is not indicated, avoid grounding/earthing or contact with grounded/earthed metal enclosures
- Performance with dimmers, where supported, may vary depending on dimmer model

25W 500mA/700mA In-Door Multi-Power LED Driver

Operation Output Diagram:

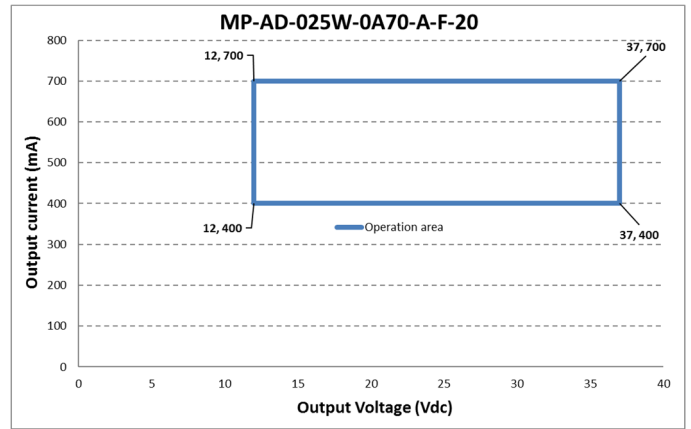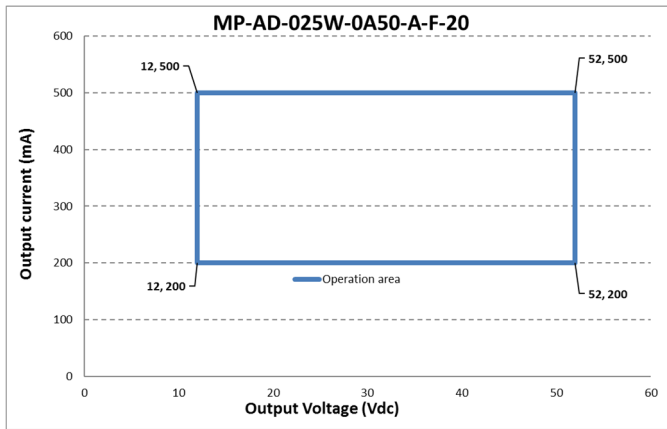

Outlook (in mm):

