


SPOT/CYLINDAR/SLIM/SURFACE MOUNT

Model: SU-SD3154

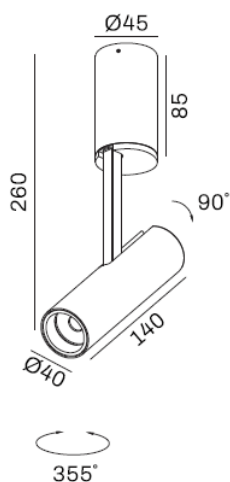

Feature:

- Recessed ultra slim cylinder spot light
- 355 degree rotate and 90 degree tilt
- Interchangeable baffle

Technical data:

- Light source COB or others
- LED Power (max) 12.6W (350mA, 36V)
- System Power (ref.) 15W (ref. only depends on the ECG)
- Lumen flux (typ.) 900lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 20D, 36D, 50D
- Tiltable Yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Baffle Finishing White/Black/silver grey/brushed bronze
- Construction Aluminum
- Installation Surface mount
- Dimension 40mm(OD)x 260mm(H)
- LED Driver Build in
- Trimless version No

Electronic control gear

Build in On/Off LED driver
(dimmable LED driver is on request)

Light Distribution For 2700K
spot 21°

h(m)	E(lx)	ø(m)
1	2172	ø0.37
2	543.1	ø0.75
3	241.4	ø1.12
4	135.8	ø1.49
5	86.90	ø1.87

****The specification is subject to change without note.****