

## TRACK/SPOT LIGHT/ANTI-GLARE/SLIM SHAPE/48VDC MAGNET TRACK

**Model: TRA-TR3052**



### Feature:


- Spot light, track light
- Low Voltage 48VDC magnet track.
- Compact design

### Technical data:

- |                          |                                   |
|--------------------------|-----------------------------------|
| ▪ Light source           | COB or others                     |
| ▪ LED Power (max)        | 12.6W (350mA, 36V)                |
| ▪ System Power (ref.)    | NA (ref. only depends on the ECG) |
| ▪ Lumen flux (typ.)      | 1100lm                            |
| ▪ Colour temperature     | 2700K, 3000K, 4000K               |
| ▪ Colour rendering index | Ra $\geq$ 90                      |
| ▪ MacAdam Step           | 3                                 |
| ▪ Beam Angle             | 20D, 30D, 40D Reflector           |
| ▪ Tilttable              | Yes                               |
| ▪ Ingress protection     | IP21                              |
| ▪ Operation temperature  | 0-40C                             |
| ▪ Protection Class       | III                               |
| ▪ LED Life time          | 50,000h L70B10                    |
| ▪ Finishing              | White/Black                       |
| ▪ Construction           | Aluminum                          |
| ▪ Installation           | Track DC 48V                      |
| ▪ Dimension              | 40mm(OD)x178mm(H)                 |
| ▪ LED Driver             | Build in track LED Driver         |
| ▪ Trimless               | NA                                |

### Electronic control gear

Build in track On/Off LED Driver  
(Dimmable LED Driver is on request)

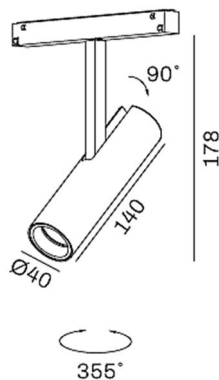

### Light Distribution For 3000K

medium 26°			wide 38°		
h(m)	E(lx)	Ø(m)	h(m)	E(lx)	Ø(m)
1	2478	Ø0.47	1	1498	Ø0.68
2	619.5	Ø0.94	2	374.5	Ø1.36
3	275.3	Ø1.40	3	166.4	Ø2.04
4	154.9	Ø1.87	4	93.62	Ø2.72
5	99.12	Ø2.34	5	59.92	Ø3.41

**\*\*The specification is subject to change without note.\*\***