


## PENDANTS/UP& DOWN LIGHT/75mm DIAMETER

**Model: SUP-PL3026**

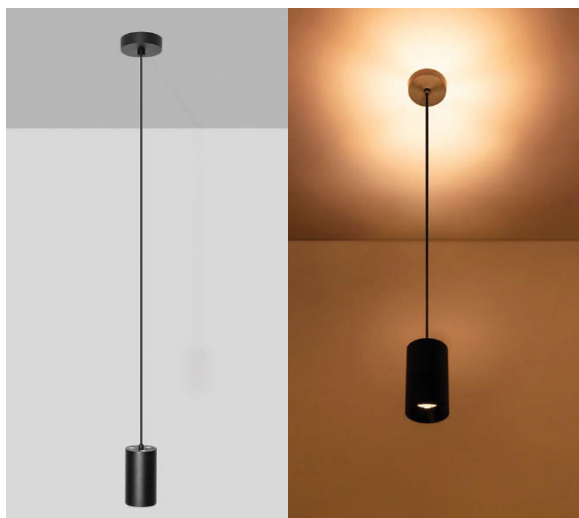


### Feature:

- UP & DOWN Spot pendant light 75mm diameter
- Compact design
- Build in LED Driver

### Technical data:

- Light source COB or others
- LED Power (max) 4.5W (500mA, 9V, UP)  
8.3W (230mA, 36V, DOWN)
- System Power (ref.) 7W + 11W (ref. only depends on the ECG)
- Lumen flux (typ.) 250lm (UP); 650lm (DOWN)
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index  $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 15D, 24D, 36D PMMA Lens
- Tiltable No
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Suspension
- Dimension 75mm(OD)x130mm(H)
- LED Driver Build in
- Trimless version NA

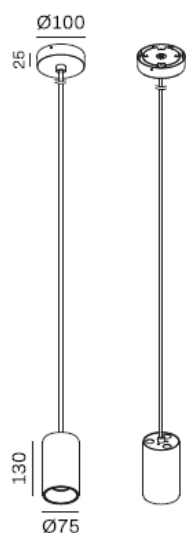

### Electronic control gear

Build in On/Off LED Driver  
(Dimmable LED Driver is on request)

#### Light Distribution For 3000K

wide 32°

h(m)	E(lx)	ø(m)
1	1409	ø0.57
2	352.3	ø1.14
3	156.6	ø1.70
4	88.06	ø2.27
5	56.36	ø2.83

**\*\*The specification is subject to change without note.\*\***