


ROUND DEEP/SPOT LIGHT/FIXED/MICRO

Model: RR-DL3437



35mm

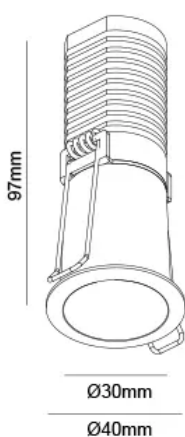

Feature:

- Deep recessed
- Compact design
- High quality PMMA lens in different beam angles

Technical data:

- Light source COB Chip or others
- LED Power (max) 6.5W (180mA, 36V)
- System Power (ref.) 8W (ref. only depends on the ECG)
- Lumen flux (typ.) 600lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index Ra \geq 90
- MacAdam step 3
- Beam Angle 22D, 40D PMMA lens
- Tilttable No
- Ingress protection IP44
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White RAL9016/Black RAL9005
- Construction Aluminum, Polycarbonate
- Installation Ceiling Recessed, spring type
- Dimension 30mm(OD)x67mm(H)/Cutout 35mm
- LED Driver Remote
- Trimless version Yes, Please check with sale in detail

Electronic control gear

NON-DIM/Dimmable

IDP MP series

Other brand is available upon request

*Use IDP multi-power LED Driver can trim down the output power according to actual application.

Light Distribution For 3000K

spot 16.5°

medium 33.2°

h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	2645	ø0.29	1	1985	ø0.35
2	661.2	ø0.58	2	496.3	ø0.70
3	293.9	ø0.87	3	220.6	ø1.06
4	165.3	ø1.16	4	124.1	ø1.41
5	105.8	ø1.45	5	79.41	ø1.77

****The specification is subject to change without note.****