

EXTERNAL/SPOT LIGHT/IP65/ZOOM SPOT



Model: EX-SD3117



SPOT



WIDE

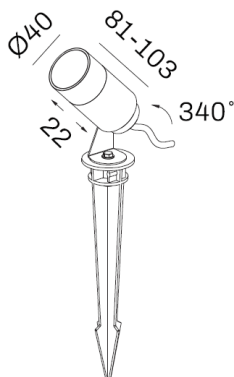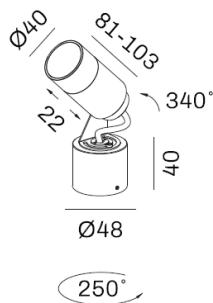

Feature:

- ZOOM Spot Light with robust structure
- 340 degree tilt and 250 degree rotate
- Different mounting method available (optional).

Technical data:

- Light source COB or others
- LED Power (max) 24V, 6W
- System Power (ref.) NA (ref. only depends on the ECG)
- Lumen flux (typ.) 350lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 13-80D Lens
- Tilttable Yes
- Ingress protection IP65
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Surface mount, Tree Strap, Spike Stand
- Dimension Refer to drawing
- LED Driver Remote
- Trimless version NA

Electronic control gear

Constant Voltage 24V LED driver
(Dimmable LED Driver is on request)

Light Distribution For 3000K

spot 13.3°			medium 34.4°			wide 81.2°		
h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	1375	ø0.23	1	478.2	ø0.62	1	238.7	ø1.72
2	343.8	ø0.47	2	119.6	ø1.24	2	59.68	ø3.43
3	152.8	ø0.70	3	53.14	ø1.86	3	26.53	ø5.15
4	85.96	ø0.93	4	29.89	ø2.48	4	14.92	ø6.86
5	55.01	ø1.17	5	19.13	ø3.10	5	9.549	ø8.58

****Accessories: Honeycomb, diffused glass, ****

****Optional mounting method, please ask the sale in detail****

****The specification is subject to change without note.****